



DUCHESNE COUNTY MONUMENT SURVEY RECORD

T3S R8W

SEC 30 | SEC 29  
SEC 31 | SEC 32

U.S.B.&M.


E-5



SCALE: 1"=30'



LINE	BEARING	DISTANCE
L1	S 67°36'49" E	25.68'
L2	N 03°50'54" W	16.40'
L3	S 66°14'30" E	5.53'
L4	N 40°38'08" E	42.00'

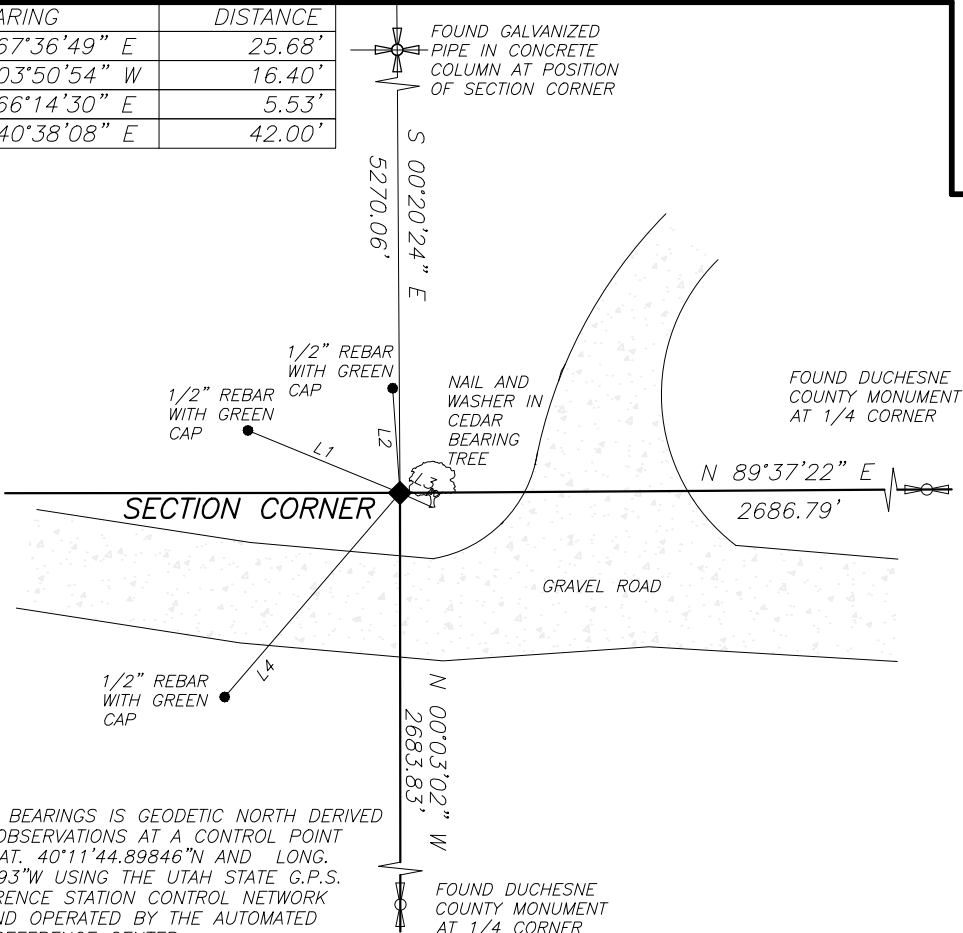

NOTE:  
THE BASIS OF BEARINGS IS GEODETIC NORTH DERIVED FROM G.P.S. OBSERVATIONS AT A CONTROL POINT LOCATED AT LAT. 40°11'44.89846"N AND LONG. 110°49'41.53893"W USING THE UTAH STATE G.P.S. VIRTUAL REFERENCE STATION CONTROL NETWORK MAINTAINED AND OPERATED BY THE AUTOMATED GEOGRAPHIC REFERENCE CENTER

DESCRIPTION OF CORNER EVIDENCE FOUND

FOUND 1/2" REBAR WITH YELLOW CAP WITH ORIGINAL MARKED STONE ALONGSIDE AT POSITION OF SECTION CORNER



PHOTO OF 1/2" REBAR WITH YELLOW CAP

DESCRIPTION OF MONUMENT AND ACCESSORIES ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THE CORNER

ACCEPTED REBAR AS CORNER AND AND SET THREE 1/2" REBAR WITH GREEN CAPS MARKED "REFERENCE MARKER"

STATE PLANE COORDINATE DATA

(U.S. SURVEY FEET)  
NAD83 UTAH CENTRAL ZONE  
N: 7236261.201  
E: 1830107.587  
NAVD88 EL: 6782.72'

LATITUDE: 40°11'00.36357" N  
LONGITUDE: 110°49'15.75751" W  
ELLIPSOID HEIGHT: 6727.33'  
(GEOID 03 CONUS)  
PUBLIC LAND SURVEY SYSTEM GCDB ID NO.  
UT300030S0080W0\_200200



PHOTO OF REBAR FACING NORTHEAST

CERTIFICATION

I Jerry D. Allred, Professional Land Surveyor, State of Utah, do hereby certify that I have performed or reviewed the work done on the diagrammed corner as reported on this recordation form and approve same

Date 13 MAY '19

Jerry D. Allred, Professional Land Surveyor  
Certificate No. 148951  
Duchesne County Surveyor

